


Data Sheet CO/P 50

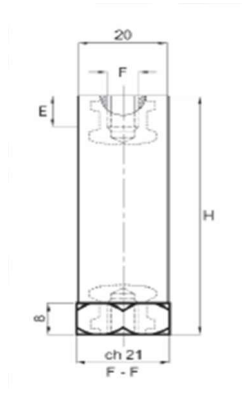

Material	Polyester material reinforced with fiberglass BMC RF 3/20
Operating Temperature	°C: - 40° + 130°
Fire reaction	UL94-V0 File Nr. E205214
	HL2 according to the EN45545-2
Thread Material	Galvanized Steel
H	50 mm
E	M5 : 8 / M6 and M8 : 10 mm
Tightening Torque	M5 : 8 Nm/ M6 : 12 Nm/ M8 : 16 Nm
Operating Voltage	750 V
A.C. surface flashover voltage	10 KV
A.C. internal flashover voltage	25 KV
Tensile stress	400 DN
Cantilever stress	100 DN
Compressive stress	2.100 DN
Twisting stress	1 - 2 DNxmm
Package	80 pcs
Weight of package	3,40 kgs