


Data Sheet CO/P 60

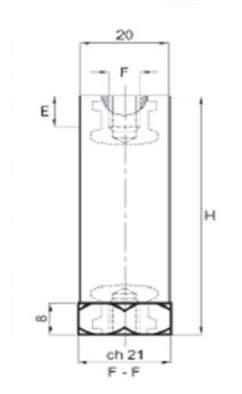

Material	Polyester material reinforced with fiberglass BMC RF 3/20
Operating Temperature	°C: - 40° + 130°
Fire reaction	UL94-V0 File Nr. E205214
	HL2 according to the EN45545-2
Thread Material	Galvanized Steel
H	60 mm
E	M6 : 12 mm / M8 : 10 mm
Tightening Torque	M6 : 12 Nm / M8 : 16 Nm
Operating Voltage	750 V
A.C. surface flashover voltage	10 KV
A.C. internal flashover voltage	30 KV
Tensile stress	400 DN
Cantilever stress	100 DN
Compressive stress	2.100 DN
Twisting stress	1 - 2 DN x mm
Package	70 pcs
Weight of package	3,40 kgs