BINAME

TECHNICAL DRAWING

Dimensions in mm

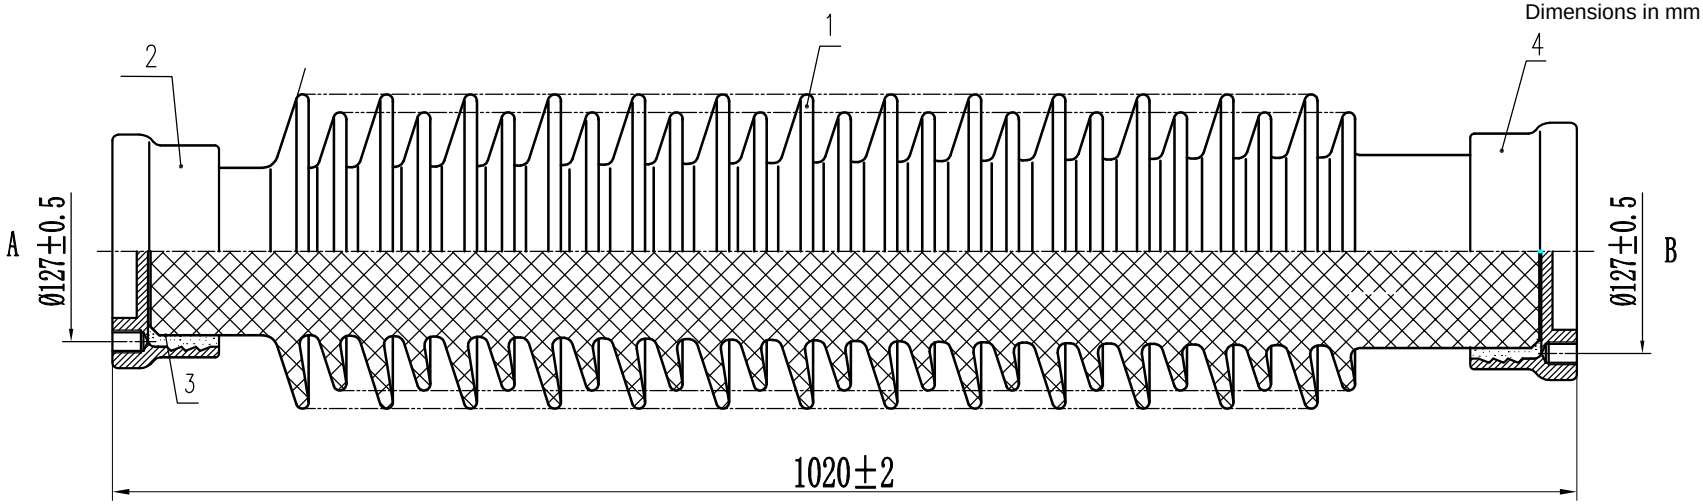

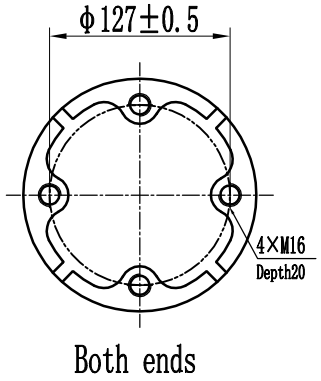

Both ends

TECHNICAL REQUIREMENTS

1. Colour: brown.
2. Minimum creepage distance: 3100 mm.
3. Ultimate cantilever strength: 4 kN.
   Ultimate torsional strength: 2.5 kN.m.
4. Impulse withstand voltage: 450 kV.
   Wet withstand voltage (S.I.): 185 kV.
5. All metal fittings: high-strength ductile iron,
   hot-dip galvanized.
6. Applicable standards: IEC 60168 and IEC 60273.

Item	Description	Qty	Material	Finish / notes
4	Bottom flange	1	QT450	HDG
3	Cement	1	P.O. 52.5	
2	Top flange	1	QT450	HDG
1	Insulator	1	C120	

C4-450-IV Outdoor solid-core post insulator Anti-pollution type - Assembly		REFERENCE **C4-450-IV**
Mass: 60.5 kg	Scale: 1:5	Sheet: 1 / 1
BINAME bv	www.biname.be | info@biname.be	