


Data Sheet CO/P 25

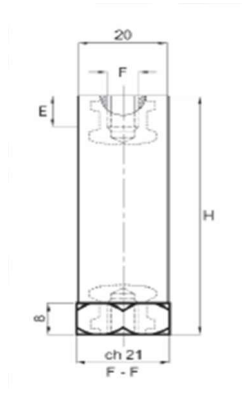

Material	Polyester material reinforced with fiberglass BMC RF 3/20
Operating Temperature	°C: - 40° + 130°
Fire reaction	UL94-V0 File Nr. E205214
	HL2 according to the EN45545-2
Thread Material	Galvanized Steel
H	25 mm
E	M4 : 7 mm / M5 : 6 mm / M6 : 7 mm / M8 : 6 mm
Tightening Torque	M4 : 2 Nm / M5 : 6 Nm / M6 : 10 Nm / M8 : 14 Nm
Operating Voltage	500 V
A.C. surface flashover voltage	5 KV
A.C. internal flashover voltage	15 KV
Tensile stress	400 DN
Cantilever stress	250 DN
Compressive stress	2.100 DN
Twisting stress	0,6 -1,7 DN x mm
Package	150 pcs
Weight of package	3,80 kgs